




BIO-BASED POLYPROPYLENE WITH NANOCELLULOSE

FOR LOW-DENSITY FOAMS


- ✓ LIGHTWEIGHT (20-100 KG/M³)
- ✓ NON-CROSSLINKED
- ✓ MICROCELLULAR STRUCTURE DUE TO NANOCELLULOSE REINFORCEMENT
- ✓ HIGHER MECHANICAL STRENGTH

APPLICATIONS

- 3D-shaped parts
- Automotive sector

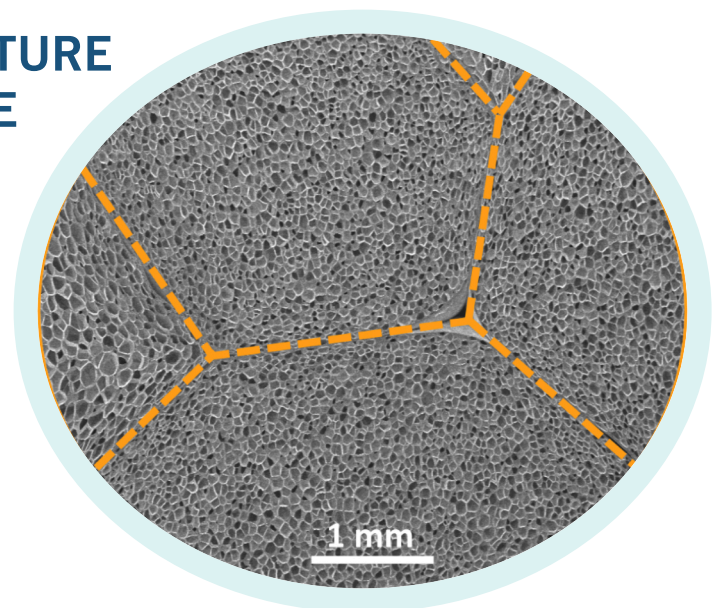

CNF PRODUCTION PROCESS

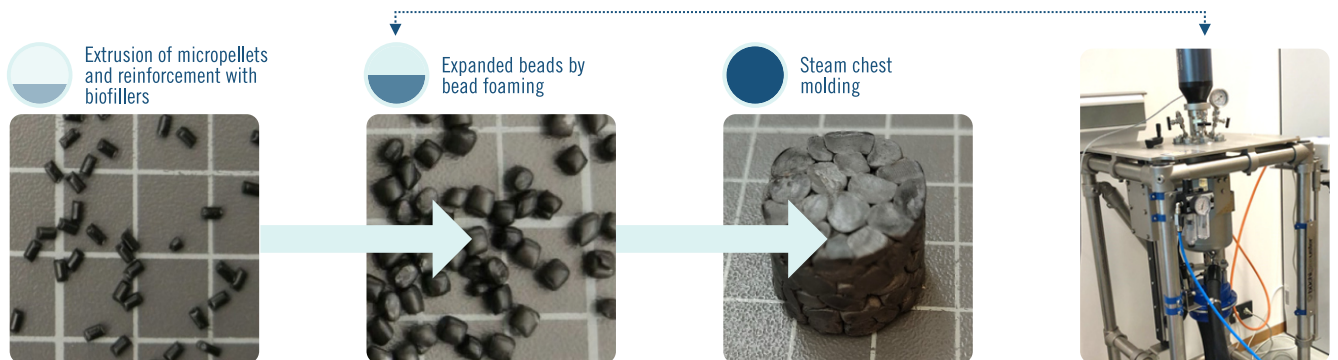

Upgraded high pressure reactor for bead foaming

CONTACT INFORMATION

COMPOUNDING WITH BIOFILLERS • CIDAUT

Mercedes Santiago Calvo, Project manager in biopolymers • M: mersan@cidaut.es • T: +34 610 004 564

BEAD FOAMING AND THERMOFORMING • CELLMAT

Alberto López, Team leader in biofoams • M: a.lopez@cellmattechnologies.com • T: +34 601 326 714

Victoria Bernardo, Team leader in physical foaming • M: v.bernardo@cellmattechnologies.com • T: +34 644 673 609



This project has received funding from the European Union's Horizon 2020 Research and Innovation programme under grant agreement No. 953206.